REVISIONS		
REV	DESCRIPTION	DATE
A	DRAWN PER ECO-20-0337	01SEP2020
A1	REVISED PER ECO-20-0360	07JAN2021

System Model: **SAFED 10R-VC X**		
OCU Model:	**SAFED-X**	
MCU Model:	**10R-VC-X**	
Configuration:	**2 MOTION 1 SPEED, ALM**	
Motors	Speeds	-
2	1	-
-	-	-

Additional Functions	# OF RLY	Additional Functions	# OF RLY
ON - ALARM	1	-	-
-	-	-	-
-	-	-	-
-	-	-	-

FREQ. TABLE X
B = 433-434
D = 450-470
E = 868
F = 902-927
MT = MOMENTARY TX

DC OPTION



AC OPTION



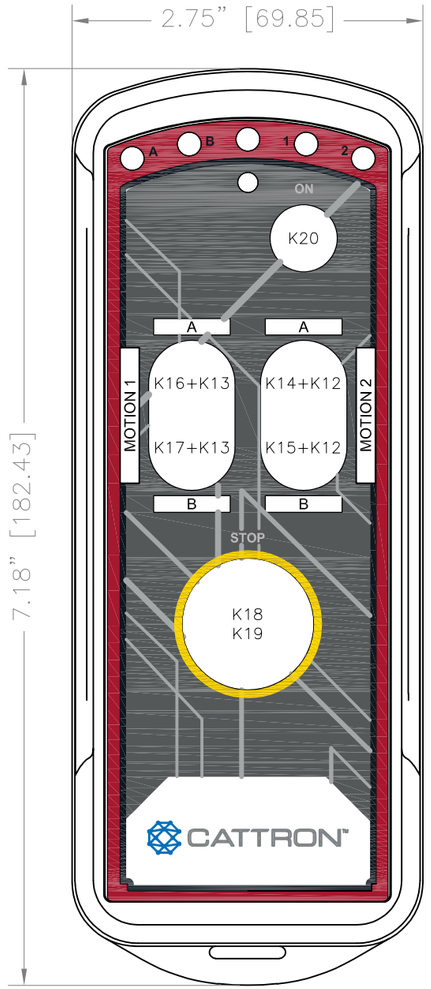

Relay Contacts

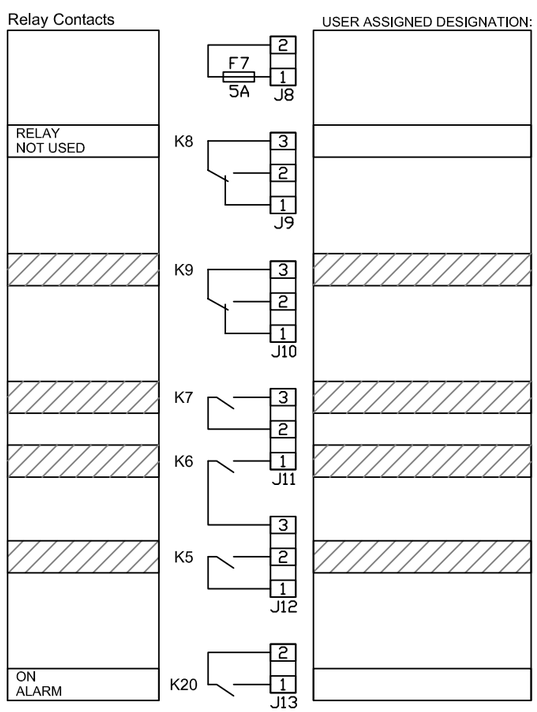

Relay Contacts

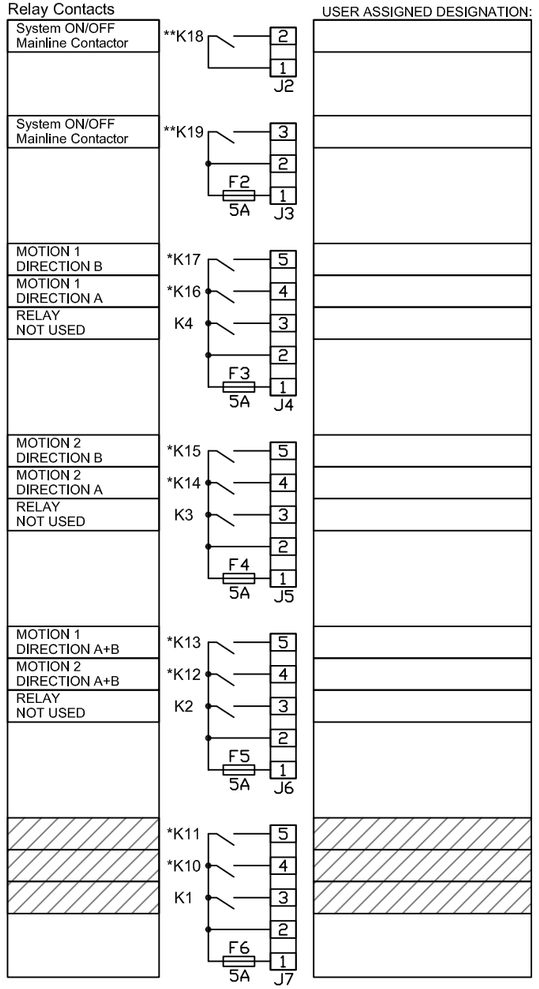

* SAFETY RELAYS
** SAFETY RELAYS

SIGNATURES	DATE
DRAWN: A. LEWIS	31AUG20
CHECKED: D. STAGG	07JAN21
ENG: D. STAGG	
Q.A.:	

THIS IS A CAD DRAWING. PREPARED IN ACCORDANCE WITH ANSI Y14

DO NOT SCALE DWG.

SHEET 01 OF 01 | REVISION A1

CATTRON™

TITLE / DESCRIPTION

SYSTEM CONFIGURATION SHEET,

SAFE-D-STOP (TM) OCU TO MCU CONFIGURATION

SIZE	PART NO.
B	N/A
SCALE	DRAWING NO.
NTS	9D04-9061-A011

THIS DOCUMENT AND ALL INFORMATION CONTAINED WITHIN ARE THE EXCLUSIVE, CONFIDENTIAL AND PROPRIETARY PROPERTY OF CATTRON. IT IS NOT TO BE REPRODUCED, NOR IS IT OR ANY PORTION OF IT TO BE USED BY OR DISCLOSED TO ANY OTHER INDIVIDUAL OR LEGAL ENTITY WITHOUT THE PRIOR, WRITTEN APPROVAL OF CATTRON. FURTHERMORE, THE INFORMATION CONTAINED WITHIN THIS CORRESPONDENCE IS ALSO TO BE HANDLED IN ACCORDANCE WITH ANY AND ALL CONFIDENTIALITY AGREEMENTS BETWEEN CATTRON AND THE RECEIVER OR USER OF THIS INFORMATION. © COPYRIGHT CATTRON 2019