

Feeder Breaker

Cattron™

PRIMARY CRUSHERS DESIGNED TO BREAK ORE INTO SMALLER SIZES VIA A DECK AND CHAIN CONVEYOR SYSTEM


HIGHLIGHTS

- Housing made of impact-resistant epoxy-coated extruded aluminum with rubberized metal plates for harsh mining environments
- Push to Operate (PTO) safety bar

FEATURES

- Multi-color status LEDs for battery status

APPLICATIONS

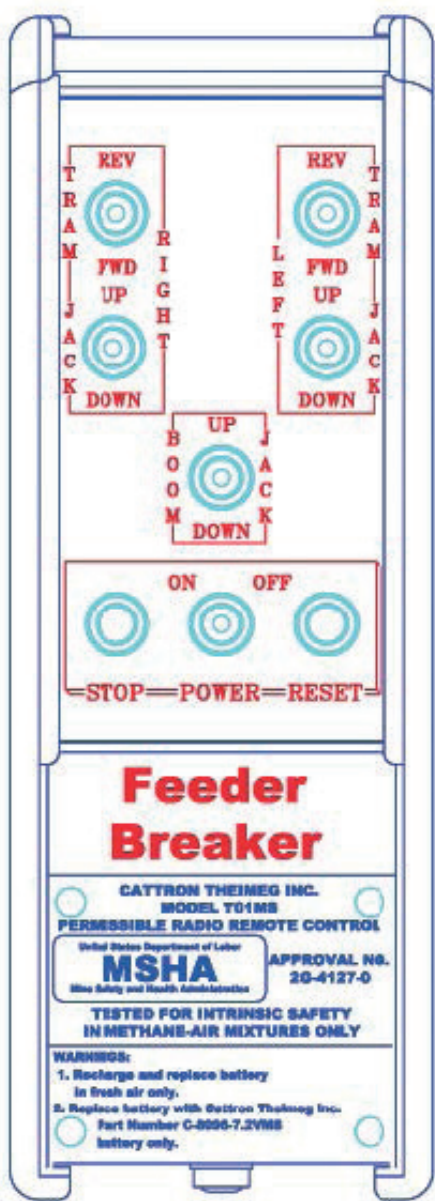

POWER ON/OFF SWITCH



When the switch is set to 'ON', internal battery power is applied to an RF transmitter within the toggle controller.

ESTOP PUSHBUTTON

This momentary pushbutton stops all functions and is the quickest way to shut down the Machine. Once pressed to stop all machine motion, the POWER ON/OFF Switch must be turned 'OFF' then back to 'ON' to resume operation of the machine.

RESET PUSHBUTTON

This momentary pushbutton is used to reset the system and must be pressed after turning the POWER ON/OFF Switch to 'ON' and before pressing the PTO Bar and any other motion switches.

Each time the controller is powered 'OFF' then back to 'ON', the RESET Pushbutton must be pressed initially before any motion commands will work.

PUSH-TO-OPERATE (PTO) BAR

This bar is a large, full length, spring-return switch located on top of the unit that is used as a safety device that electronically disconnects all motion switches when it is released, thus stopping motion commands from these switches.

The switch is easily and naturally activated by a convenient and comfortable part of the operator's hand and must be pressed before and held when commanding movement of the 'TRAM' and the 'BOOM'. It should be noted that operation of the PTO bar is not required to select 'TRAM MODE' or 'BOOM MODE'.

TRANSMIT & LOW BATTERY LED

Located on top of the controller, this LED is part of the battery management system and flashes green when the controller's Power ON/OFF Switch is set to 'ON' and the controller is transmitting with a good battery installed. The LED flashes red when the battery is low and sounds a beeper to alert the operator. In addition, a low battery cut-off circuit stops the controller micro-processor when voltage goes below safe operating range. This is because RF transmitters always operate at full power over the entire life of the battery.

USA: +1.234.806.0018
Systems-US-Sales@lairdtech.com

Europe: +49.2151.4795.0
Systems-EU-Sales@lairdtech.com

Asia: +86.21.3120.0188
Systems-CN-Sales@lairdtech.com

Latin America: +55.19.3518.7030
Systems-BR-Sales@lairdtech.com

www.lairdtech.com

FEEDER BREAKER_DS_EN_201810

Any information furnished by Laird Limited, its subsidiary companies and its agents (hereafter, "Laird") is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird disclaims liability for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect at the time of sale. A current copy of the Laird Terms and Conditions will be furnished upon request. This document is © Copyright 2018, Laird, all rights reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trademarks of Laird. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.