
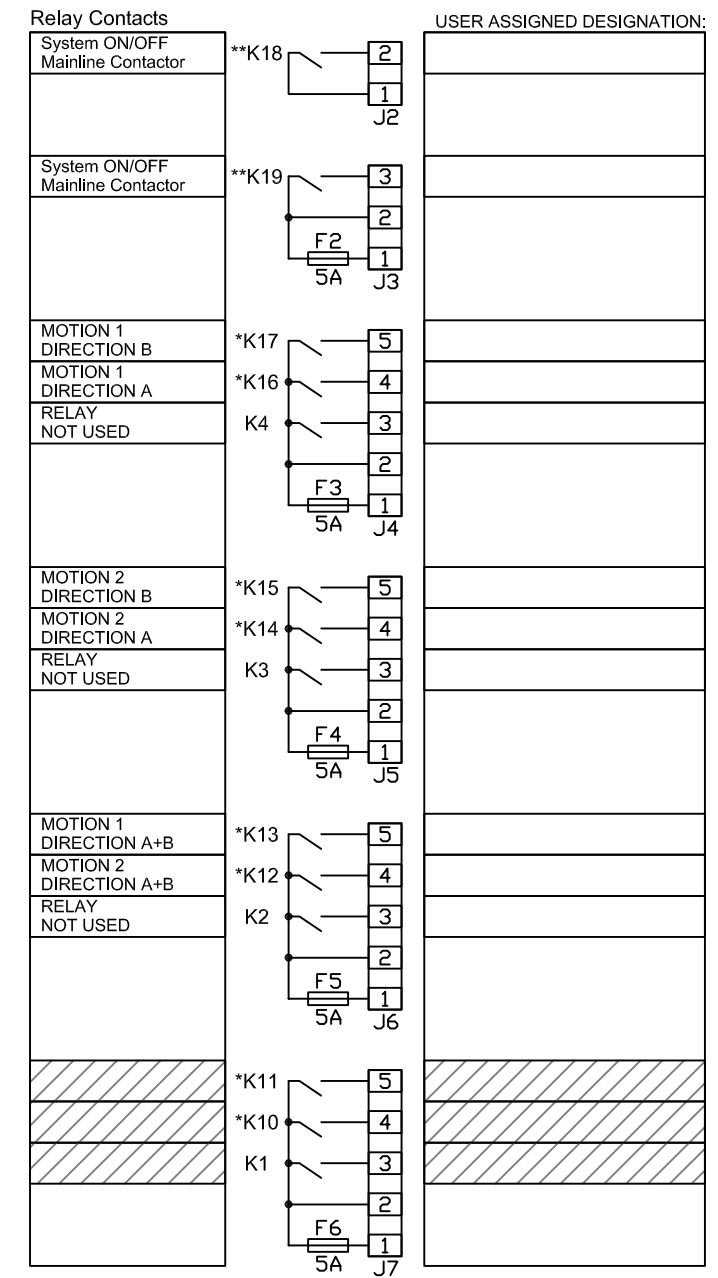
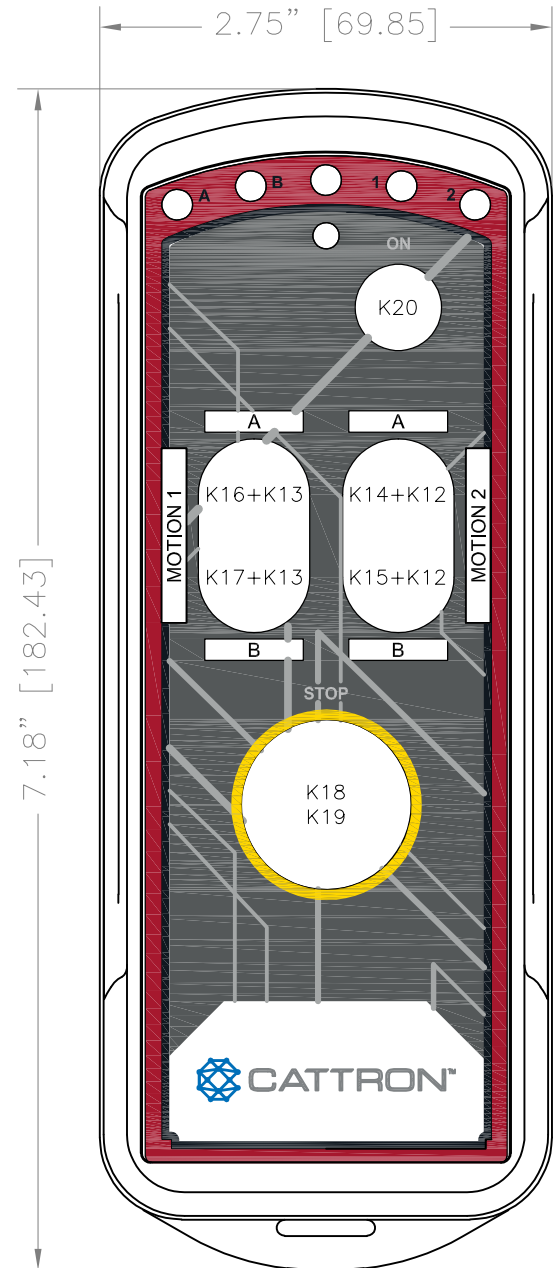
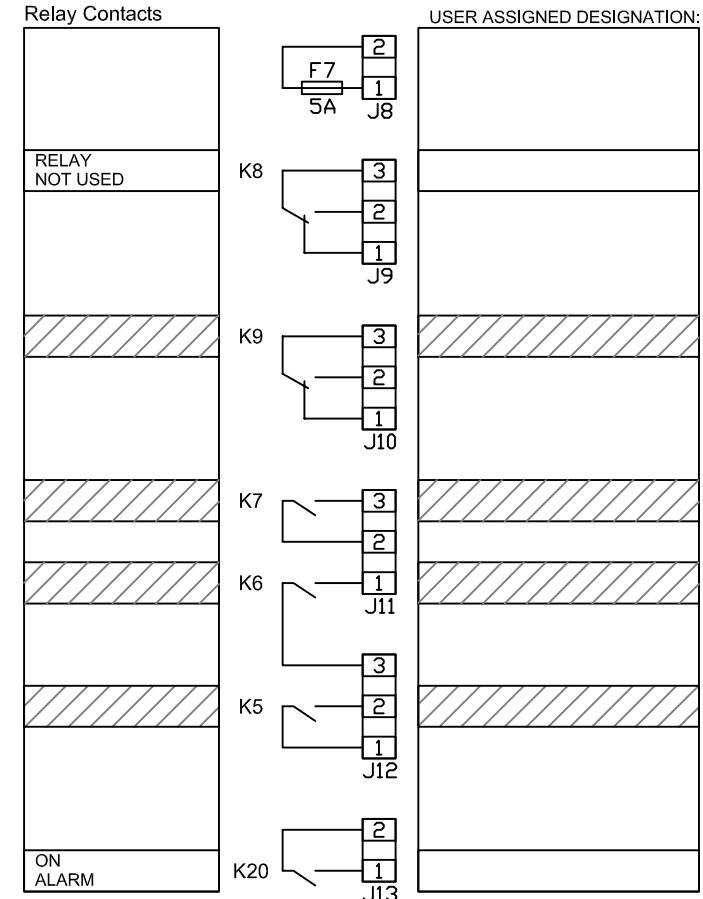


REVISIONS		
REV	DESCRIPTION	DATE
A	DRAWN PER ECD-20-0337	01SEP2020
A1	REVISED PER ECD-20-0360	07JAN2021

System Model: SAFED 10R-VC X MT			
OCU Model: SAFED-X-MT			
MCU Model: 10R-VC-X-MT			
Configuration: 2 MOTION 1 SPEED, ALM, MT			
Motors	Speeds	-	
2	1	-	
-	-	-	
Additional Functions	# OF RLY	Additional Functions	# OF RLY
ON - ALARM	1	-	-
-	-	-	-
-	-	-	-
-	-	-	-

FREQ. TABLE X
 B = 433-434
 D = 450-470
 E = 868
 F = 902-927
 MT = MOMENTARY TX

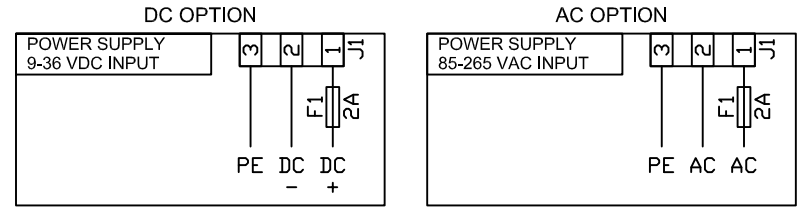

* SAFETY RELAYS
 ** SAFETY RELAYS

SIGNATURES		DATE	 SYSTEM CONFIGURATION SHEET, SAFE-D-STOP (TM) OCU TO MCU CONFIGURATION
DRAWN: A. LEWIS		31AUG20	
CHECKED: D. STAGG		07JAN21	
ENG: D. STAGG			
Q.A.:			
THIS IS A CAD DRAWING, PREPARED IN ACCORDANCE WITH ANSI Y14		SIZE B	PART NO. N/A
DO NOT SCALE DWG.		SCALE NTS	DRAWING NO. 9D04-9061-A014
SHEET 01 OF 01	REVISION A1		

THIS DOCUMENT AND ALL INFORMATION CONTAINED WITHIN ARE THE EXCLUSIVE CONFIDENTIAL AND PROPRIETARY PROPERTY OF CATTRON. IT IS NOT TO BE REPRODUCED, NOR IS IT OR ANY PORTION OF IT TO BE USED BY OR DISCLOSED TO ANY OTHER INDIVIDUAL OR LEGAL ENTITY, WITHOUT THE PRIOR WRITTEN APPROVAL OF CATTRON. FURTHERMORE, THE INFORMATION CONTAINED WITHIN THIS CORRESPONDENCE IS ALSO TO BE HANDLED IN ACCORDANCE WITH ANY AND ALL CONFIDENTIALITY AGREEMENTS BETWEEN CATTRON AND THE RECEIVER OR USER OF THIS INFORMATION. © COPYRIGHT CATTRON 2019